


**Tip 155A**

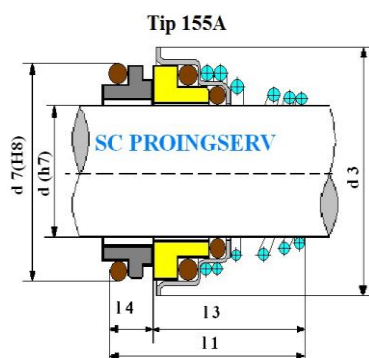

**Caracteristici principale:**

Presiune: 1Mpa

Temperatura: -30°~200° C

Viteza: 15 m/s

**Materiale:**

Inel rotativ: Ceramica, SIC, TC

Inel stationar: Carbon, SIC, TC

Etansare secundara: NBR, EPDM, Viton

Arc si alte parti: otel inox 304, 316

Inlocuieste: Burgmann **BT-FN.NU**,

| Model    | d  | d3 | d7 | 11 | 13 | 14 |
|----------|----|----|----|----|----|----|
| 155 - 10 | 10 | 20 | 21 | 22 | 15 | 7  |
| 155 - 12 | 12 | 22 | 23 | 25 | 18 | 7  |
| 155 - 14 | 14 | 25 | 25 | 29 | 22 | 7  |
| 155 - 16 | 16 | 29 | 27 | 30 | 23 | 7  |
| 155 - 18 | 18 | 33 | 33 | 34 | 24 | 10 |
| 155 - 20 | 20 | 33 | 35 | 35 | 25 | 10 |
| 155 - 22 | 22 | 38 | 37 | 35 | 25 | 10 |
| 155 - 24 | 24 | 38 | 39 | 37 | 27 | 10 |
| 155 - 25 | 25 | 40 | 40 | 37 | 27 | 10 |
| 155 - 28 | 28 | 46 | 43 | 39 | 29 | 10 |
| 155 - 30 | 30 | 46 | 45 | 40 | 30 | 10 |
| 155 - 32 | 32 | 46 | 48 | 40 | 30 | 10 |
| 155 - 33 | 33 | 50 | 48 | 49 | 39 | 10 |
| 155 - 35 | 35 | 50 | 50 | 48 | 39 | 10 |
| 155 - 38 | 38 | 55 | 56 | 52 | 39 | 13 |
| 155 - 40 | 40 | 55 | 56 | 52 | 39 | 13 |